



## Initial Setup Guide

TVI DVR MODELS

## Startup and Shutdown

Proper startup and shutdown procedures are crucial to expanding the life of the DVR.


To start your DVR:

1. Check the power supply is plugged into an electrical outlet. It is HIGHLY recommended that an Uninterruptible Power Supply (UPS) be used in conjunction with the device. The Power LED on the front panel should be red, indicating the device gets the power supply.
2. Press the POWER button on the front panel. The Power LED should turn green. The unit will begin to start.

To shut down the DVR:

Enter the Shutdown menu.

1. Click on **Menu**.

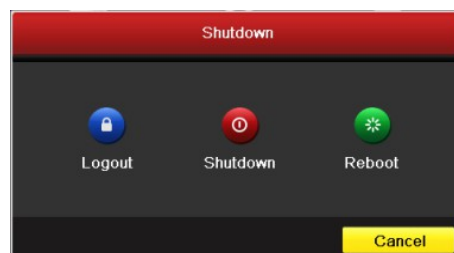

Shutdown Menu

2. Click on **Shutdown**.
3. Click on **Yes**.

## Using the Start Wizard


By default, the Setup Wizard starts once the DVR has loaded, as shown below.



Start Wizard Interface

Operating the Setup Wizard:

1. The Setup Wizard can walk you through some important settings of the DVR. If you don't want to use the Setup Wizard at that moment, click on **Cancel**. You can also choose to use the Setup Wizard next time by leaving the "Start wizard when DVR starts?" **check box** checked.
2. Click on **Next** on the Wizard window to enter the **Login** window.

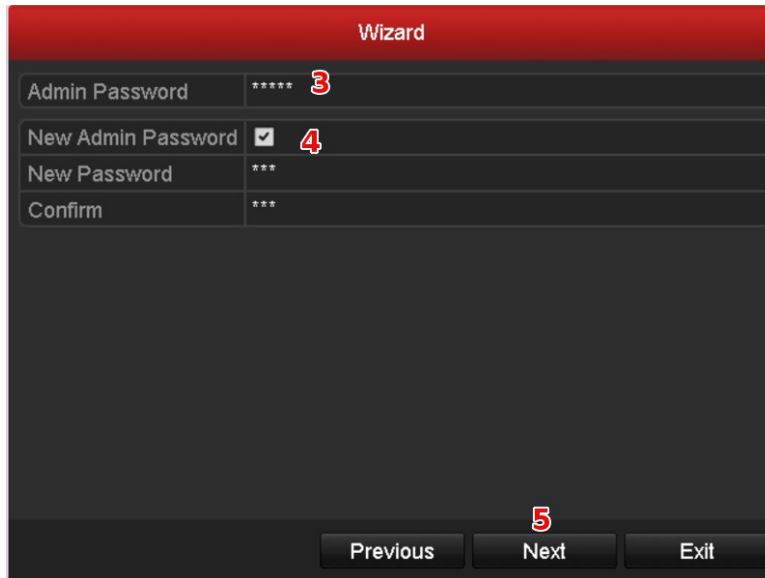

The screenshot shows a 'Wizard' window with a red header. It contains four input fields: 'Admin Password' with masked characters '\*\*\*\*\*' and a red '3' next to it; 'New Admin Password' with a checked checkbox and a red '4' next to it; 'New Password' with masked characters '\*\*\*'; and 'Confirm' with masked characters '\*\*\*'. At the bottom, there are three buttons: 'Previous', 'Next' (with a red '5' above it), and 'Exit'.

Login Window

3. Enter the **Admin Password**. By default, the password is admin123.
4. To change the admin password, check the **New Admin Password** check box. Enter the new password and confirm the password in the given fields.
5. Click on **Next** to open the date and time settings window.
6. Adjust the Time Settings.



The screenshot shows a 'Wizard' window with a red header. It contains four settings: 'Time Zone' set to '(GMT+08:00) Beijing, Urumqi, Singapore'; 'Date Format' set to 'MM-DD-YYYY'; 'System Date' set to '05-08-2013' with a red '6' next to it and a calendar icon; and 'System Time' set to '15:22:59' with a clock icon. At the bottom, there are three buttons: 'Previous', 'Next' (with a red '7' above it), and 'Exit'.

Date and Time Settings

7. Click on **Next**. This will take you back to the Network Setup Wizard window.

Wizard	
Working Mode	Multi-address
Select NIC	LAN1
NIC Type	10M/100M/1000M Self-adaptive
Enable DHCP	<input type="checkbox"/>
IPv4 Address	172 .6 .21 .110 <b>8</b>
IPv4 Subnet Mask	255 .255 .255 .0
IPv4 Default Gateway	172 .6 .21 .1
Preferred DNS Server	
Alternate DNS Server	
Default Route	LAN1
<b>9</b>	
<input type="button" value="Previous"/> <input type="button" value="Next"/> <input type="button" value="Exit"/>	


### Network Configuration

8. Configure your Network Settings.
9. Click on **Next** after the settings are configured. The Advanced Network Setup Wizard window will open.

Wizard	
Server Port	8000
HTTP Port	80 <b>10</b>
RTSP Port	554
Enable UPnP	<input checked="" type="checkbox"/>
Enable Cloud P2P	<input type="checkbox"/>
Verification Code	ABCDEF
Enable DDNS	<input type="checkbox"/>
DDNS Type	HIDDNS
Server Address	www.hiddns.com
Device Domain Name	
User Name	
Password	
<b>11</b>	
<input type="button" value="Previous"/> <input type="button" value="Next"/> <input type="button" value="Exit"/>	

### Advanced Network Setup

10. Set the parameters of port No., Cloud P2P, Auto UPnP, or DDNS if required.
11. Click on **Next** after configuring the advanced parameters. The HDD Management interface will open.

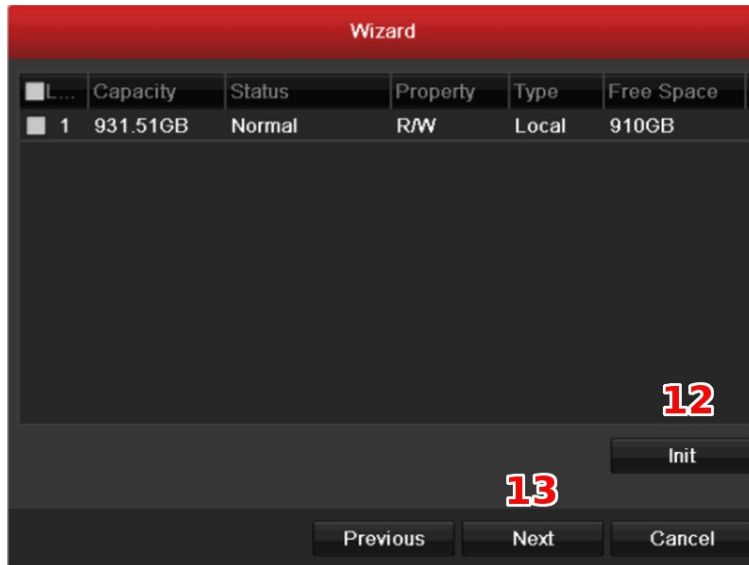

HDD Management

12. To initialize the HDD, click on **Init**. Initialization removes all the data saved in the HDD.
13. Click on **Next** button. The Record Settings interface will pop up.



Record Settings

14. Click on **Copy** to copy the recording setting to other cameras.
15. Click on **OK** to save the settings.
16. Click on **Exit** to close the wizard.